19” DYNAmic Basic Server Cabinets / W:600mm- D:1000mm

W=600mm D=1000mm DYNAmic Basic Series Server Cabinets

DYNAmic Basic series Server Cabinets, provide maximum optimization resulted to an optimum performance in between quality and added value.

While product gives maximum performance on servering and storage infrastructure, in parallel provides a very valuable economy compared to its quality which is based on high technologic fully automated industry.

The 600 series is available in 2 as 26U and 42U, with 1000mm depth.

Each cabinet is supplied as standard with a %63 perforated single piece monoblock front and rear door, steel rear panel and lift off steel side panels, all of which are lockable.

DYNAmic Basic series Server Cabinets have a professional technical but aesthetic look with decorative %63 perforated honey comb pattern. The product range attracts the attention with the mostly environmentally fit and selected color of RAL 9005 Black, and RAL 7035 Light Grey, with fine wrinkle soft touch paint.

Completely standard and stocked product portfolio, being delivered as un-assembled in flat pack, as shipping configuration the adjustable feet group is included.

DYNAmic Basic series server product range with optimal panel mounting size, and a variety range of accesorries enclose the whole expectation of users.

W600xD1000mm



19” DYNAmic Basic Server Cabinets / W:600mm- D:1000mm


CONSTRUCTION DETAILS:

Main Profile- Framework- Top/Bottom Cases:
Multi Folded Automated Bending technology applied corner profile system, provides a heavy duty structure results to high load capacity of: 600 kgs.

Monoblock multi folded top and bottom cases, tighty fixed to the framework with fixing hardware , fully modular system generated.

Top case has a ready Forced Ventilation (Fan Module) integration housing.

Bottom case integrated with Wide cable entry point provides maximum versality. The knock out panel style cable entry point at bottom with w=350mmxd=250mm allows large cabling infrastructure applications.

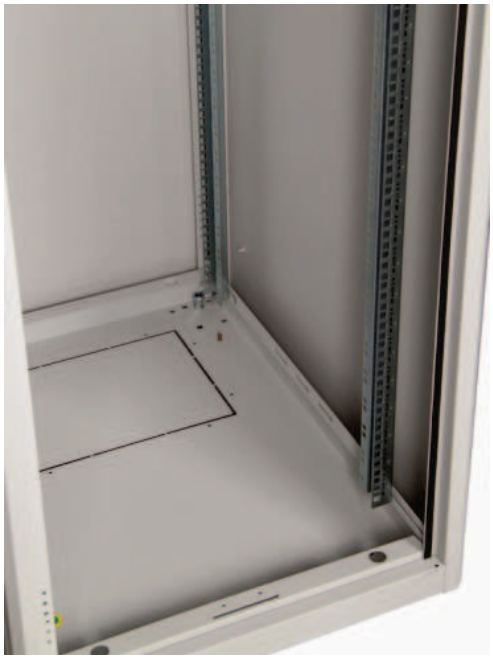





19” DYNAmic Basic Server Cabinets / W:600mm- D:1000mm

CONSTRUCTION DETAILS:

Access to enclosure:
Front door and rear doors are %63 perforated single piece monoblock front single point locking handled lock.

Colors are RAL 7035 Light Grey Cabinet and for RAL 9005 Black.

Front door openning direction is set right to left, but reversible to left to right at site with removing the hinge system. Hinge System is spring loaded easy operating version, which allows you to remove the whole front door from cabinet in seconds.





Side Panels are lockable and removable with barrel style lock, Multifolded bending technology with 8 fold bending provides the rigidity. Easy mechanical locking of panel to main frame with snap capture sytem allows easy attachment of panels and easy removal in seconds while installation in process.

Rear Panels are lockable and removable with barrel style lock, Multifolded bending technology with 8 fold bending provides the rigidity. For best optimized cost conduction to customers, the rear panel designed and created with same mechanical concept and sizes of the side panels.

19” DYNAmic Basic Server Cabinets / W:600mm- D:1000mm

CONSTRUCTION DETAILS:

19’’ rails of DYNAmic Basic Series Server cabinets are with automated silk-screen U numbering, depends on size 1U to 42U, same from top to bottom or bottom to top results to same U height selection. No matter from where you have started counting. 19’’ rails are 4 fold bending surfaces, 1,5mm thickness provides the high load capacities. The 19’’ rails are made of steel with 8-12 micron zinc plating for corrosion resistance. 19’’ rails are adjustable in depth. For easy adjustment purpose, no need to detach the screws, just ease the screws and slide them in the channels on the top/bottom chasis bends.



Side Horizontal Support Bar in depth; 1 set (left/right) , 1,5mm thickness Z type made of Steel + 8-12 micron zinc plated **side horizontal support bar**

All design features provide 4 way access to your enclosure and equipments, easy to reach to enclosure and equipments for all infrastucture installations and maintenance needs.

